
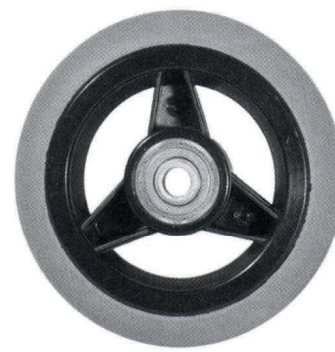


VollGummi 3-Speichen-Felge
Solid rubber 3-spokes-rim
(100x30 mm)

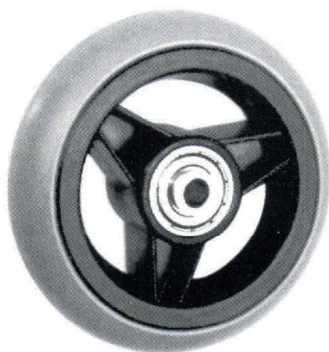

4"

PolyUrethan 3-Speichen-Felge 3S
Polyurethane 3-spokes-rim 3S
(100x30 mm)

PolyUrethan 3-Speichen-Felge 3S
Polyurethane 3-spokes-rim 3S
(100x30 mm)

Standard Ausführungen


Nabenlänge 36 mm / 39 mm / 45 mm
Bohrung 8 mm
Tragfähigkeit 50 kg

Standard

hub length 36 mm / 39 mm / 45 mm
bore 8 mm
carrying cap 50 kg




VollGummi Hohlspeichen-Felge HS
Solid rubber rim with hollow spokes HS
(125x32 mm)

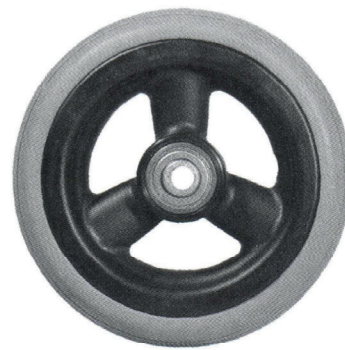


PolyUrethan Hohlspeichen-Felge HS
Polyurethane rim with hollow spokes HS
(125x32 mm)

5"

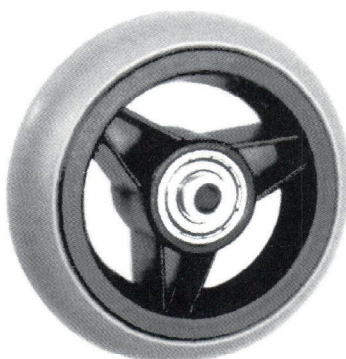

VollGummi 3-Speichen-Felge 3S
Solid rubber 3-spoke-rim 3S
(125x32 mm)

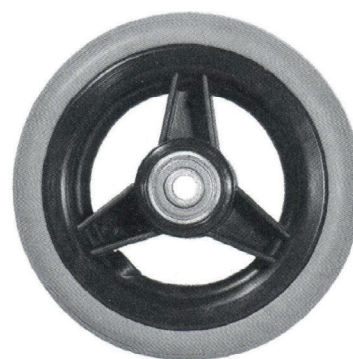

PolyUrethan 3-Speichen-Felge 3S
Polyurethane 3-spokes-rim 3S
(125x32 mm)

Standard Ausführungen


Nabenlänge 36 mm / 39 mm / 45 mm
Bohrung 8 mm
Tragfähigkeit 50 kg

Standard

hub length 36 mm / 39 mm / 45 mm
bore 8 mm
carrying cap 50 kg



GummiSchaum Hohlspeichen-Felge HS
Rubber foam rim with hollow spokes HS
[140x40 mm]



GummiSchaum 3-Speichen-Felge 3S
Rubber foam 3-spokes-rim 3S
[140x40 mm]


6"



GummiSchaum 5-Speichen-Felge 5S
Rubber foam 5-spokes-rim 5S
[140x40 mm]


Standard Ausführungen
Nabenlänge 45 mm / 60 mm
Bohrung 8 mm
Tragfähigkeit 80 kg

Standard
hub length 45 mm / 60 mm
bore 8 mm
carrying cap 80 kg



GummiSchaum Hohlspeichen-Felge HS
Rubber foam rim with hollow spokes HS
[150x30 mm]

6"




GummiSchaum 3-Speichen-Felge 3S
Rubber foam 3-spokes-rim 3S
[150x30 mm]

Standard Ausführungen
Nabenlänge 36 mm / 39 mm / 45 mm
Bohrung 8 mm
Tragfähigkeit 80 kg

Standard
hub length 36 mm / 39 mm / 45 mm
bore 8 mm
carrying cap 80 kg



LuFt-Reifen Hohlspeichen-Felge HS
Pneumatic tyre rim with hollow spokes HS
(150x30 mm)



PolyUrethan Hohlspeichen-Felge HS
Polyurethane rim with hollow spokes HS
(150x30 mm)



PolyUrethan 3-Speichen-Felge 3S
Polyurethane 3-spokes-rim 3S
(150x33 mm)



LuFt-Reifen 3-Speichen-Felge 3S
Pneumatic 3-spokes-rim 3S
(150x30 mm)

6“



VollGummi 3-Speichen-Felge 3S
Solid rubber 3-spokes-rim 3S
(150x32 mm)




PolyUrethan 3-Speichen-Felge 3S
Polyurethane 3-spokes-rim 3S
(150x32 mm)

Standard Ausführungen
Nabenlänge 36 mm / 45 mm
Bohrung 8 mm
Tragfähigkeit 50 kg


Standard
hub length 36 mm / 45 mm
bore 8 mm
carrying cap 50 kg



VollGummi Hohlspeichen-Felge HS
Solid rubber rim with hollow spokes HS
(175x28 mm)



VollGummi 3-Speichen-Felge 3S
Solid rubber 3-spokes-rim 3S
(175x28 mm)



VollGummi 5-Speichen-Felge 5S
Solid rubber 5-spokes-rim 5S
(175x28 mm)

7"



VollGummi 3-Speichen-Felge 3S
Solid rubber 3-spokes-rim 3S
(175x36 mm)



PolyUrethan 3-Speichen-Felge 3S
Solid rubber 3-spokes-rim 3S
(175x35 mm)

Standard Ausführungen

Nabenlänge 45 mm / 60 mm
Bohrung 8 mm
Tragfähigkeit 50 kg

Standard

hub length 45 mm / 60 mm
bore 8 mm
carrying cap 50 kg



PolyUrethan Hohlspeichen-Felge HS
Polyurethane rim with hollow spokes HS
(180x42 mm)




LuFt-Reifen Hohlspeichen-Felge HS
Pneumatic tyre rim with hollow spokes HS
(180x42 mm)




PolyUrethan 3-Speichen-Felge 3S
Polyurethane 3-spokes-rim 3S
(180x42 mm)

7"

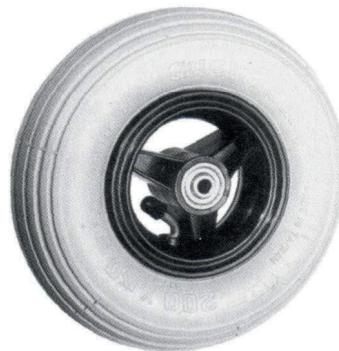

LuFt-Reifen 3-Speichen-Felge 3S
Pneumatic tyre 3-spokes-rim 3S
(180x42 mm)

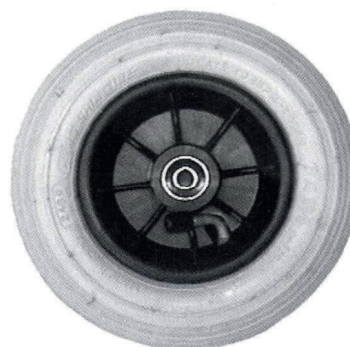

LuFt-Reifen verrippte Felge
Pneumatic tyre rim with ribs
(180x45 mm)

Standard Ausführungen


Nabenlänge 45 mm / 60 mm
Bohrung 8 mm
Tragfähigkeit 50 kg

Standard

hub length 45 mm / 60 mm
bore 8 mm
carrying cap 50 kg



LuFt-Reifen Hohlspeichen-Felge HS
Pneumatic tyre rim with hollow spokes HS
(200x32 mm)




PolyUrethan Hohlspeichen-Felge HS
Polyurethane rim with hollow spokes HS
(200x32 mm)



LuFt-Reifen Hohlspeichen-Felge HS
Pneumatic tyre rim with hollow spokes HS
(200x50 mm)

8"



PolyUrethan Hohlspeichen-Felge HS
Polyurethane rim with hollow spokes HS
(200x50 mm)



LuFt-Reifen 3-Speichen-Felge 3S
Pneumatic tyre 3-spokes-rim 3S
(200x50 mm)



LuFt-Reifen 2-tlg.-Felge
Pneumatic tyre 2 part rim
(200x50 mm)

Standard Ausführungen
Nabenlänge 45 mm / 60 mm
Bohrung 8 mm
Tragfähigkeit 50 kg

Standard
hub length 45 mm / 60 mm
bore 8 mm
carrying cap 50 kg



VollGummi Hohlspeichen-Felge HS
Solid rubber rim with hollow spokes HS
(200x32 mm)




VollGummi 5-Speichen-Felge 5S
Solid rubber 5-spokes-rim 5S
(200x32 mm)



VollGummi 8-Speichen-Felge 8S
Solid rubber 8-spokes-rim 8S
(200x32 mm)

8"



PolyUrethan 3-Speichen-Felge 3S
Polyurethane 3-spokes-rim 3S
(200x32 mm)



PolyUrethan 5-Speichen-Felge 5S
Polyurethane 5-spokes-rim 5S
(200x32 mm)



PolyUrethan 5-Speichen-Felge 5S
Solid rubber 5- spokes-rim 5S
(200x38 mm)

Standard Ausführungen
Nabenlänge 45 mm / 60 mm
Bohrung 8 mm
Tragfähigkeit 50 kg

Standard
hub length 45 mm / 60 mm
bore 8 mm
carrying cap 50 kg



9"



LuFt-Reifen 2-tlg. Felge
Pneumatic tyre two part rim
(230x70 mm)

LuFt-Reifen Verrippte Felge
Pneumatic tyre rim with ribs
(230x70 mm)

Standard Ausführungen
Nabenlänge 90 mm / 95 mm
Bohrung 12 mm
Tragfähigkeit 50 kg

Standard
hub length 90 mm / 95 mm
bore 12 mm
carrying cap 50 kg



10"


LuFt-Reifen 5-Speichen-Felge 5S
Pneumatic tyre 5-spokes-rim 5S
(250x50 mm)

Standard Ausführungen
Nabenlänge 54 mm
Bohrung 12 mm
Tragfähigkeit 75 kg

Standard
hub length 54 mm
bore 12 mm
carrying cap 75 kg




LuFt-Reifen 2-tlg. Felge
Pneumatic tyre 2-part-rim
(260x85 mm)

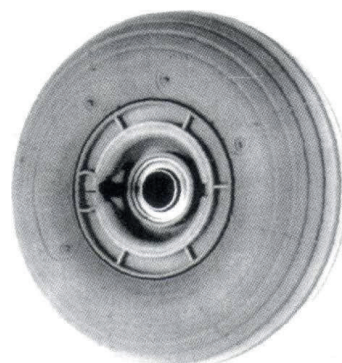

LuFt-Reifen Spengring-Felge
Pneumatic tyre rim with springring
(260x85 mm)



LuFt-Reifen Verrippte Felge
Pneumatic tyre rim with ribs
(260x85 mm)

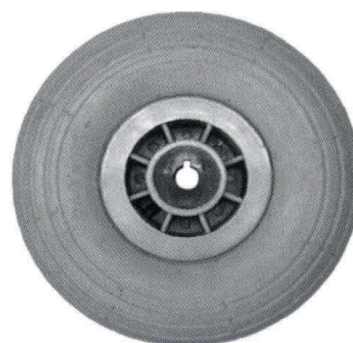

LuFt-Reifen Antriebs-Felge
Pneumatic tyre rim with a keyway
(260x85 mm)

Standard Ausführungen


Nabenlänge 66 mm / 72 mm
Bohrung 12 mm / 20 mm
Tragfähigkeit 75 kg
Keilnutbohrung auf Anfrage

Standard

hub length 66 mm / 72 mm
bore 12 mm / 20 mm
carrying cap 75 kg
dimensions of keyways on request



LuFt-Reifen Hohlspeichen-Felge HS
Pneumatic tyre rim with hollow spokes HS
(310x55 mm)



PolyUrethan Hohlspeichen-Felge HS
Polyurethane rim with hollow spokes HS
(310x55 mm)



PolyUrethan 5-Speichen-Felge SE
Polyurethane 5-spokes-rim SE
(310x55 mm)


12"



LuFt-Reifen 5-Speichen-Felge SE
Pneumatic tyre 5-spokes-rim SE
(310x55 mm)



LuFt-Reifen 5-Speichen-Felge 5S
Pneumatic tyre 5-spokes-rim 5S
(310x55 mm)



LuFt-Reifen 7-Speichen-Felge 7S
Pneumatic tyre 7-spokes-rim 7S
(310x55 mm or 355x75 mm)

Standard Ausführungen

Nabenlänge 54 mm

Bohrung 12 mm


Tragfähigkeit 75 kg

Standard

hub length 54 mm

bore 12 mm

carrying cap 75 kg

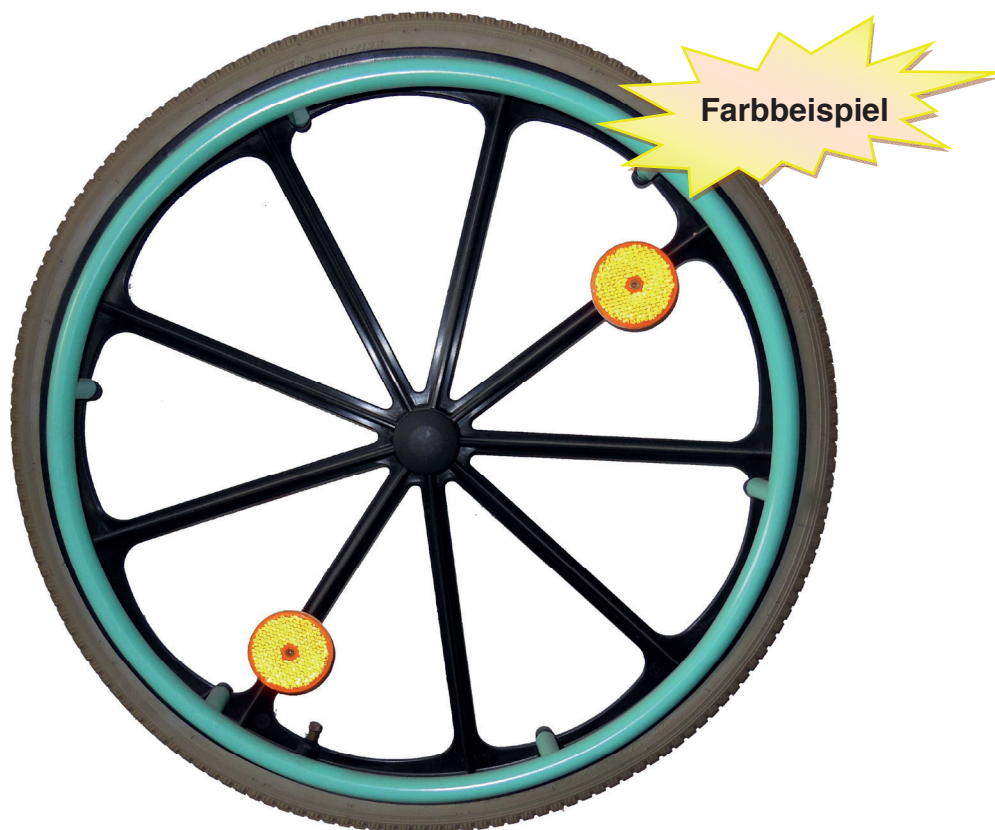

Luft-Reifen 24“-Rad mit Handlauf
pneumatic tyre 24“ wheel with handrim
610 x 35 mm

Farben color

weiß	ähnlich RAL	9016
rot	ähnlich RAL	3000
gelb	ähnlich RAL	1023
kobaltblau	ähnlich RAL	5013
blau	ähnlich RAL	5002
schwarz	ähnlich RAL	9005
grau	ähnlich RAL	7038



**Der Handlauf wird mit lebensmittelechten Farben komplett durchgefärbt.
The handrim is completely colored with food-safe colors.**

Standard Ausführungen

Nabenlänge 54 mm
Bohrung 12 mm
Tragfähigkeit 75 kg

Standard

hub length 54 mm
bore 12 mm
carrying cap 75 kg

Gurtzuggetriebe MINI

Aus besonders hochwertigem Kunststoff und Zinkdruckguss


- selbstschmierend
- geräuscharm
- wartungsfrei
- bruch- und schlagfest

Zubehör

Walzenkappe

aus Zinkdruckguss
für 40 mm 8-kant Welle.
SW 44 mm x 30 mm lang.

Artikel-Nr.:
120.SW40



Zubehör

Walzeneinsatz

aus Kunststoff
für 40 mm 8-kant Welle.
SW 38,5 mm x 40 mm lang.



Artikel-Nr.:
121.SW40K

Walzeneinsatz

aus glasfaserverstärktem Kunststoff
für 60 mm 8-kant Welle.
SW 57,5 mm x 60 mm lang.



Artikel-Nr.:
123.SW60K

Artikel-Nr. 144.xxx	.115	.125	.135	.140	.150	.155	.160	.170	.180
Durchmesser in mm	115	125	135	140	150	155	160	170	180
Gurtaufnahme in m	1,2	2,0	2,9	3,8	4,7	5,3	6,0	9,3	12,6
Hubhöhe in m	3,0	4,5	5,9	7,3	8,7	9,5	10,4	13,2	16,0

Untersetzung
Belastung

2 : 1

Rolladenpanzergewicht bis 30 kg

Gurtzuggetriebe NOVA

Aus besonders hochwertigem Kunststoff und Zinkdruckguss

- selbstschmierend
- geräuscharm
- wartungsfrei
- bruch- und schlagfest



Zubehör

Anschraublager

für Rolladenkästen
aus verz. Stahl,
130 mm x 55 mm x 4 mm



Artikel-Nr.:
136.000 gekröpft 25 mm
137.000 gekröpft 12 mm

Walzeneinsatz
aus glasfaserverstärktem Kunststoff, mit Flachrundzapfen aus Stahl.

Für 60 mm 8-kant Welle.



Artikel-Nr.:
423.SW60K

Artikel-Nr. 143.xxx	.190	.200	.210	.220	.230
Durchmesser in mm	190	200	210	220	230
Gurtaufnahme in m	6,5	7,5	9	10,5	12
Hubhöhe in m	1,8	2,2	2,6	3,3	4,1

Untersetzung
Belastung

2,5 : 1

Rolladenpanzergewicht bis 60 kg

Gurtzuggetriebe PRIMAT

Aus besonders hochwertigem Kunststoff und Zinkdruckguss

- selbstschmierend
- geräuscharm
- wartungsfrei
- bruch- und schlagfest



Artikel-Nr. 142.xxx		.165	.180	.195
Durchmesser	in mm	16	180	195
Gurtaufnahme	in m	5	7	10
Hubhöhe	in m	3	3	3
Untersetzung		2 : 1		
Belastung		Rolladenpanzergewicht bis 60 kg		

Zubehör

Anschraublager
für Rolladenkästen
aus verz. Stahl,
130 mm x 55 mm x 4 mm



Artikel-Nr.:
136.000 gekröpft 25 mm
137.000 gekröpft 12 mm

Walzeneinsatz
aus glasfaserverstärktem
Kunststoff, mit Flachrund-
zapfen aus Stahl.

Für 60 mm 8-kant Welle.




Artikel-Nr.:
423.SW60K

Rollboys aus ABS - Kunststoff, hochbelastbar, hygienisch, unverwüstlich und lebensmittelecht
temperaturbeständig von - 40° bis + 70° C



Farbbeispiel

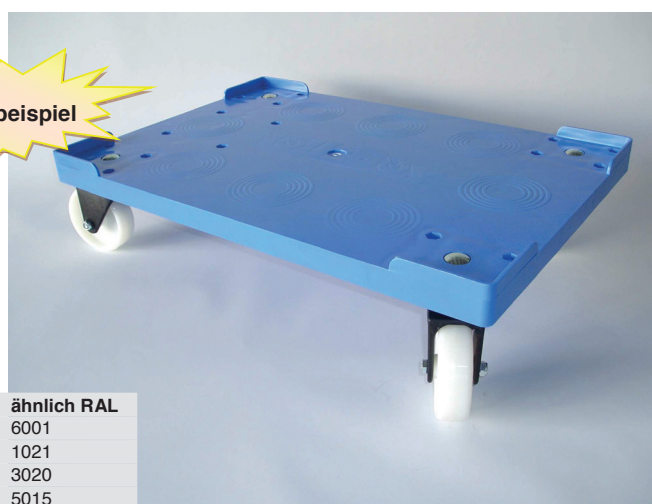

Farben	ähnlich RAL
grün	6001
gelb	1021
rot	3020
blau	5015

Größe der Nutzfläche 65 x 44 cm
(KNG) Standard 4 Lenkrollen
(LG) Standard 4 Lenkrollen
(KNG) 2 x Lenkrolle + 2 x Bockrolle
(LG) 2 x Lenkrolle + 2 x Bockrolle

Größe der Nutzfläche 60 x 40 cm
(KNG) Standard 4 Lenkrollen
(LG) Standard 4 Lenkrollen
(KNG) 2 x Lenkrolle + 2 x Bockrolle
(LG) 2 x Lenkrolle + 2 x Bockrolle

(KNG) = Gummirollen max. Belastung 180 KG • (LG) = Polyamidrollen max. Belastung 250 KG

Hochwertiges verzinktes Achsmaterial